



Data Sheet

CR1130


Nominal Voltage	3 V	Dimensions (mm)  <table><tr><td>A</td><td>$\Phi 9.64^{+0}_{-0.04}$</td></tr><tr><td>B</td><td>$\Phi 11.6^{+0}_{-0.10}$</td></tr><tr><td>C</td><td>$2.45^{+0}_{-0.05}$</td></tr><tr><td>D</td><td>$3.0^{+0}_{-0.2}$</td></tr></table>	A	$\Phi 9.64^{+0}_{-0.04}$	B	$\Phi 11.6^{+0}_{-0.10}$	C	$2.45^{+0}_{-0.05}$	D	$3.0^{+0}_{-0.2}$
A	$\Phi 9.64^{+0}_{-0.04}$									
B	$\Phi 11.6^{+0}_{-0.10}$									
C	$2.45^{+0}_{-0.05}$									
D	$3.0^{+0}_{-0.2}$									
Nominal Capacity	48 mAh									
Standard Load	68 K Ω									
Standard Current	0.1 mA									
Max Pulse Current	5 mA									
Operating Temperature	-20~60°C									
Weight	0.86 (g)									
Chemistry	Lithium / Manganese Dioxide									
UL Certification	MH10136									

Note: Capacity 48mAh is obtained at standard cc load to 2.0V at 23°C.


Discharge Characteristics

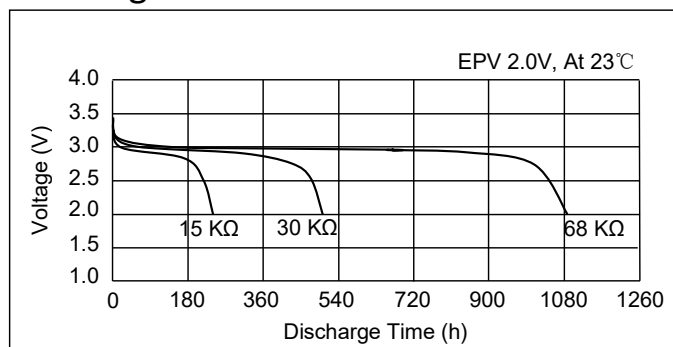

Temperature Characteristics

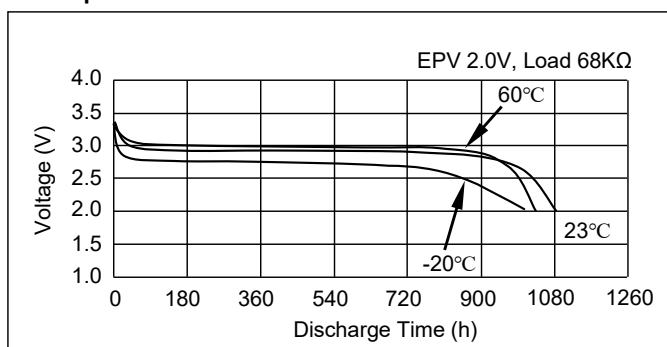

Pulse Discharge Characteristics

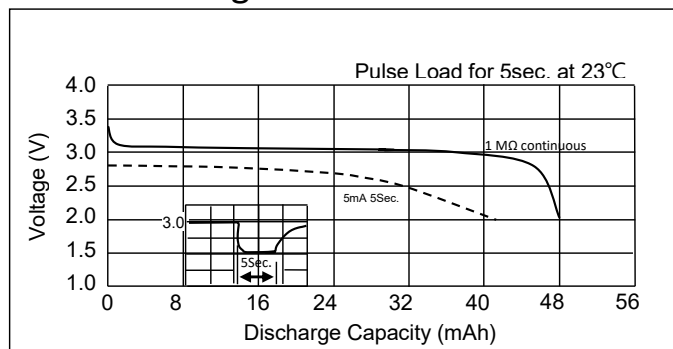

Load vs. Capacity

