



Data Sheet

CR1216


Nominal Voltage	3 V	Dimensions (mm) 								
Nominal Capacity	30 mAh									
Standard Load	62 KΩ									
Standard Current	0.05 mA									
Max Pulse Current	5 mA									
Operating Temperature	-20~60℃									
Weight	0.65 (g)									
Chemistry	Lithium / Manganese Dioxide	<table><tr><td>A</td><td>Φ10.67⁺⁰_{-0.04}</td></tr><tr><td>B</td><td>Φ12.5⁺⁰_{-0.15}</td></tr><tr><td>C</td><td>1.25⁺⁰_{-0.05}</td></tr><tr><td>D</td><td>1.6⁺⁰_{-0.2}</td></tr></table>	A	Φ10.67 ⁺⁰ _{-0.04}	B	Φ12.5 ⁺⁰ _{-0.15}	C	1.25 ⁺⁰ _{-0.05}	D	1.6 ⁺⁰ _{-0.2}
A	Φ10.67 ⁺⁰ _{-0.04}									
B	Φ12.5 ⁺⁰ _{-0.15}									
C	1.25 ⁺⁰ _{-0.05}									
D	1.6 ⁺⁰ _{-0.2}									
UL Certification	MH10136									

Note: Capacity 30mAh is obtained at standard cc load to 2.0V at 23°C.


Discharge Characteristics

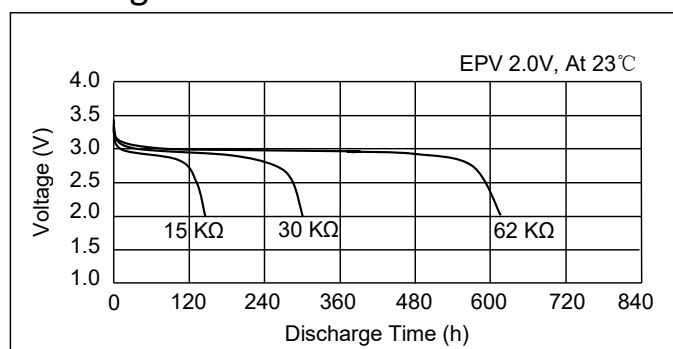

Temperature Characteristics

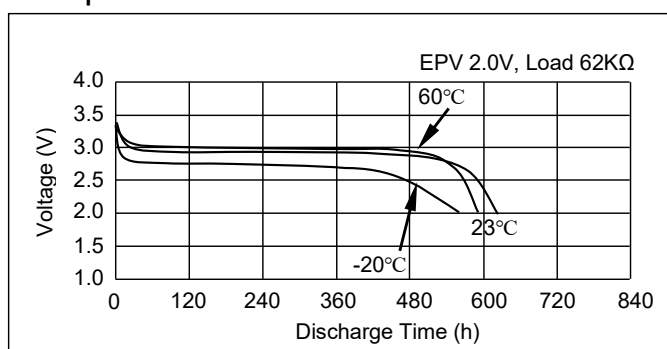

Pulse Discharge Characteristics

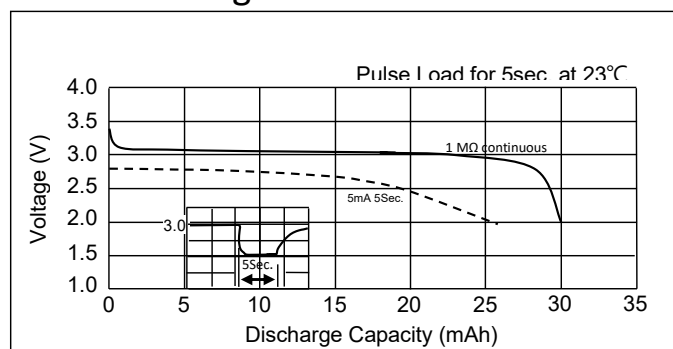

Load vs. Capacity

