


Data Sheet


CR1620

Nominal Voltage	3 V	Dimensions (mm) 
Nominal Capacity	70 mAh	
Standard Load	47 KΩ	
Standard Current	0.065 mA	
Max. Continuous Current	0.65 mA	
Max Pulse Current	8 mA	
Operating Temperature	-20~60°C	
Weight	1.25 (g)	
Chemistry	Lithium / Manganese Dioxide	
UL Certification	MH10136	


A	Φ14.04 ⁺⁰ _{-0.04}
B	Φ16.0 ⁺⁰ _{-0.15}
C	1.45 ⁺⁰ _{-0.05}
D	2.00 ⁺⁰ _{-0.2}

Note: Capacity 70mAh is obtained at standard cc load to 2.0V at 23°C.


Discharge Characteristics

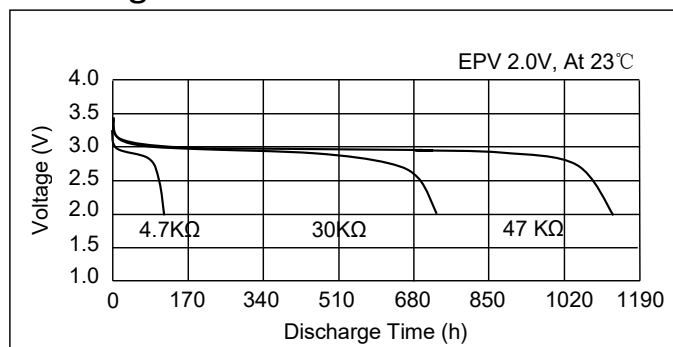

Temperature Characteristics

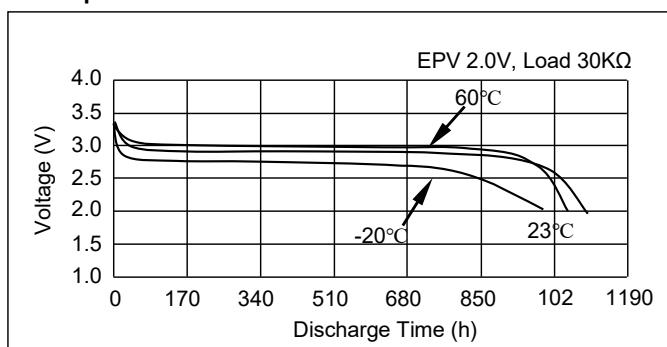

Pulse Discharge Characteristics

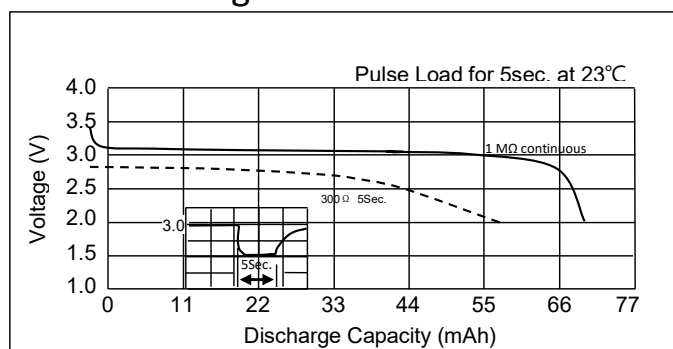

Load vs. Capacity

