



Data Sheet

CR1632


Nominal Voltage	3 V	Dimensions (mm) 								
Nominal Capacity	130 mAh									
Standard Load	30 KΩ									
Standard Current	0.2 mA									
Max. Continuous Current	1 mA									
Max Pulse Current	8 mA									
Operating Temperature	-20~60°C									
Weight	1.8 (g)									
Chemistry	Lithium / Manganese Dioxide	<table><tr><td>A</td><td>Φ13.53^{+0.01}₋₀</td></tr><tr><td>B</td><td>Φ16.00⁺⁰_{-0.15}</td></tr><tr><td>C</td><td>2.86^{+0.02}_{-0.02}</td></tr><tr><td>D</td><td>3.20⁺⁰_{-0.2}</td></tr></table>	A	Φ13.53 ^{+0.01} ₋₀	B	Φ16.00 ⁺⁰ _{-0.15}	C	2.86 ^{+0.02} _{-0.02}	D	3.20 ⁺⁰ _{-0.2}
A	Φ13.53 ^{+0.01} ₋₀									
B	Φ16.00 ⁺⁰ _{-0.15}									
C	2.86 ^{+0.02} _{-0.02}									
D	3.20 ⁺⁰ _{-0.2}									
UL Certification	MH10136									

Note: Capacity 130mAh is obtained at standard cc load to 2.0V at 23°C.


Discharge Characteristics

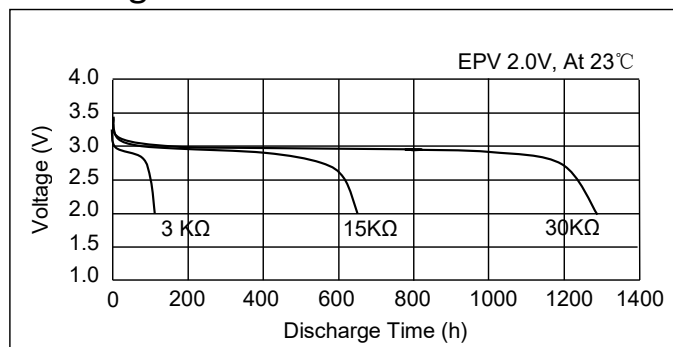

Temperature Characteristics

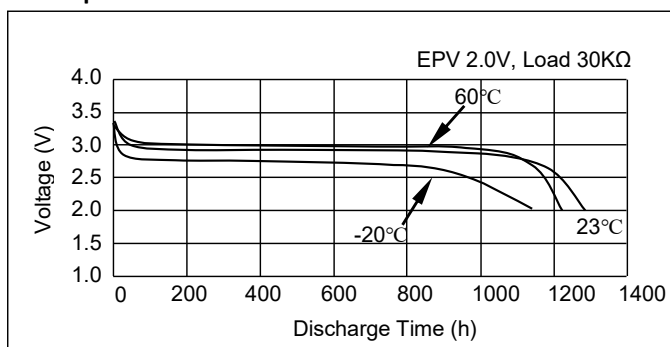

Pulse Discharge Characteristics

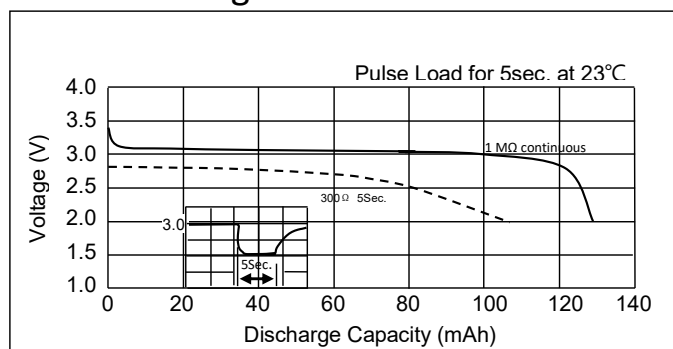

Load vs. Capacity

