



Connector Location A


Connector Location B

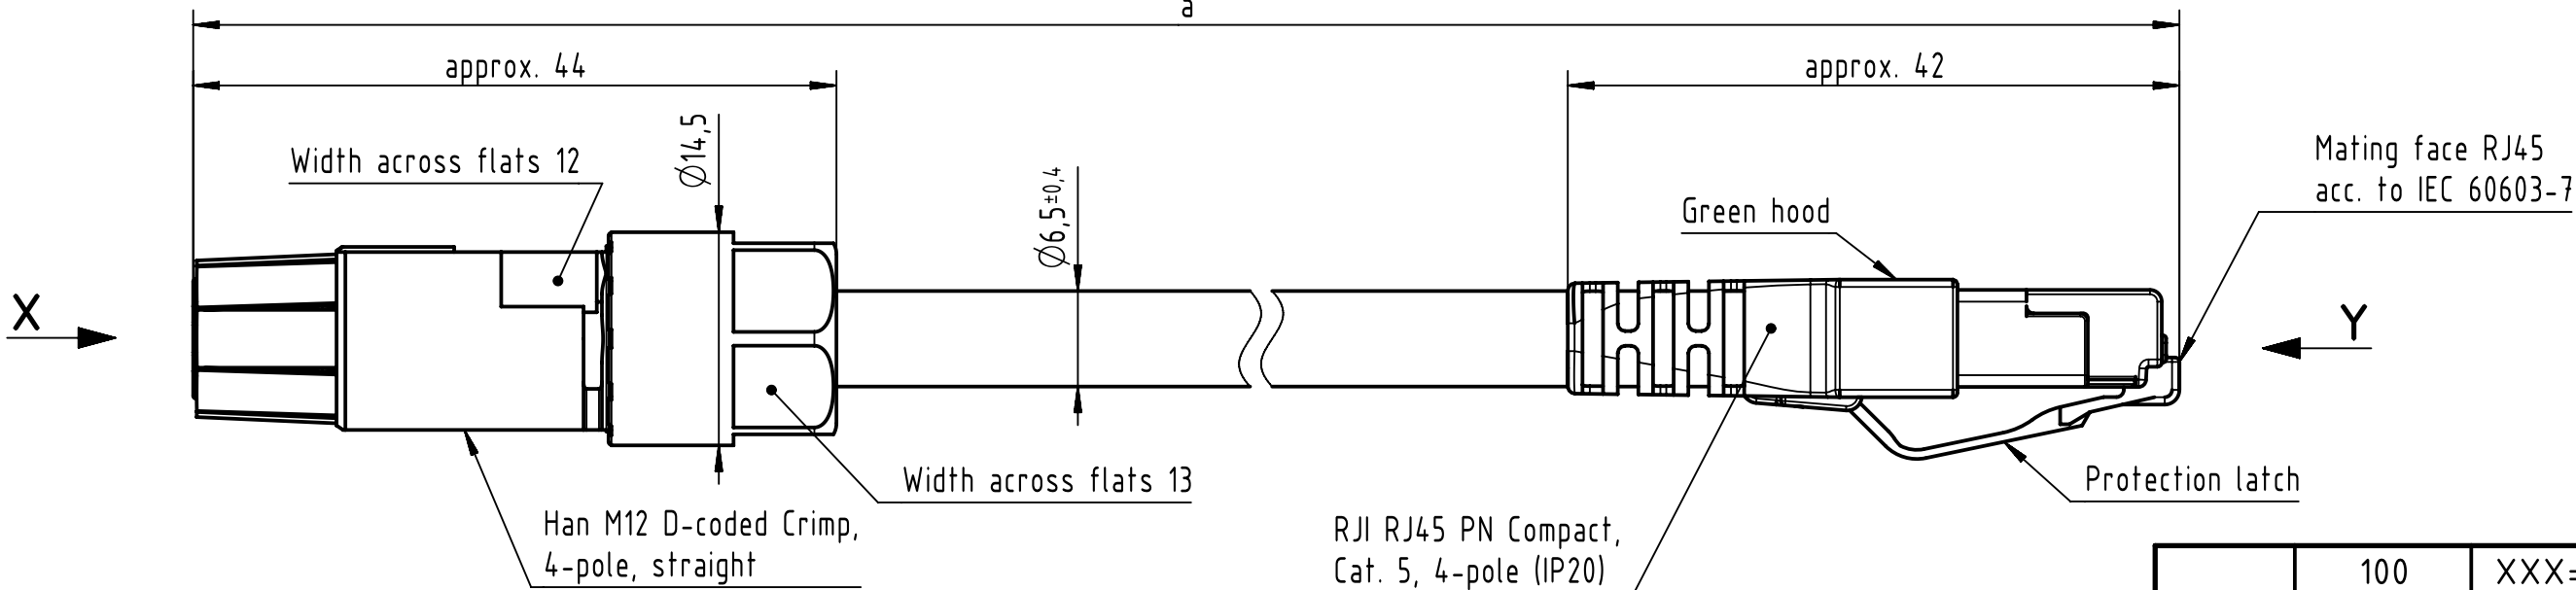



X female



Loading Plan

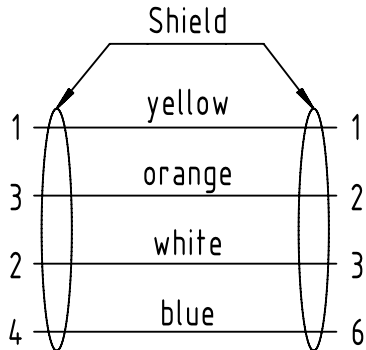

Y male

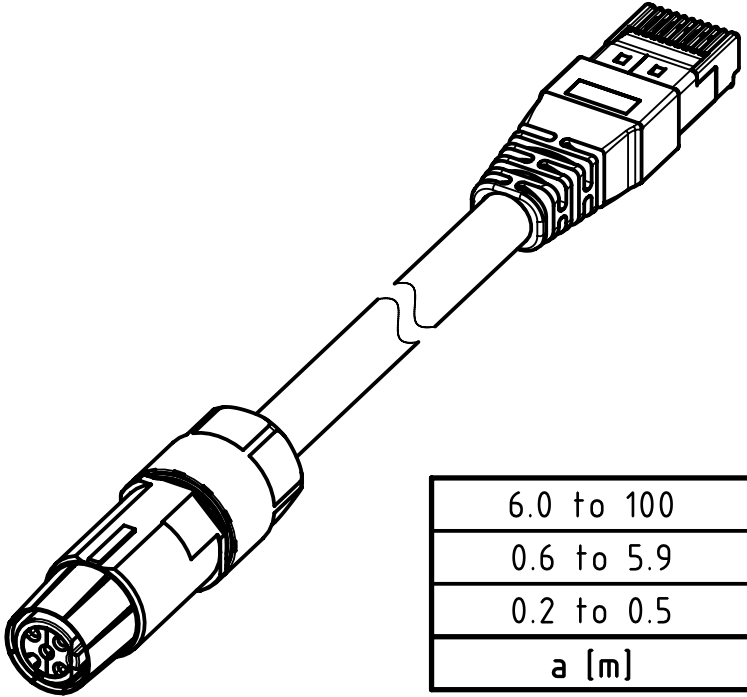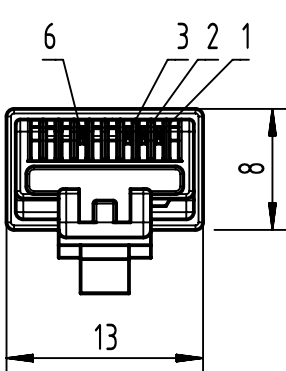

6.0 to 100	$\pm 1\%$
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

HAR PROFINET Typ C
4xAWG 22/7 PUR Trail. green

0948C3C6004XXX

Type of cable

Part no.

- Temperature range: -40°C ... +70°C

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by 407576 Stoica		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean	
Department HCS - RO		Title Han M12 D-cod 4-pol f - RJ45 PUR		Date 2023-06-13		State Final Release	
HARTING Customised Solutions		Type TB		Number 0948C3C6004XXX		Doc-Key / ECM-Nr. 101002957/UGD/000/B 500000245637	
D-32339 Espelkamp						Rev. B	
						Page 1/1	