



Connector Location A



Connector Location B

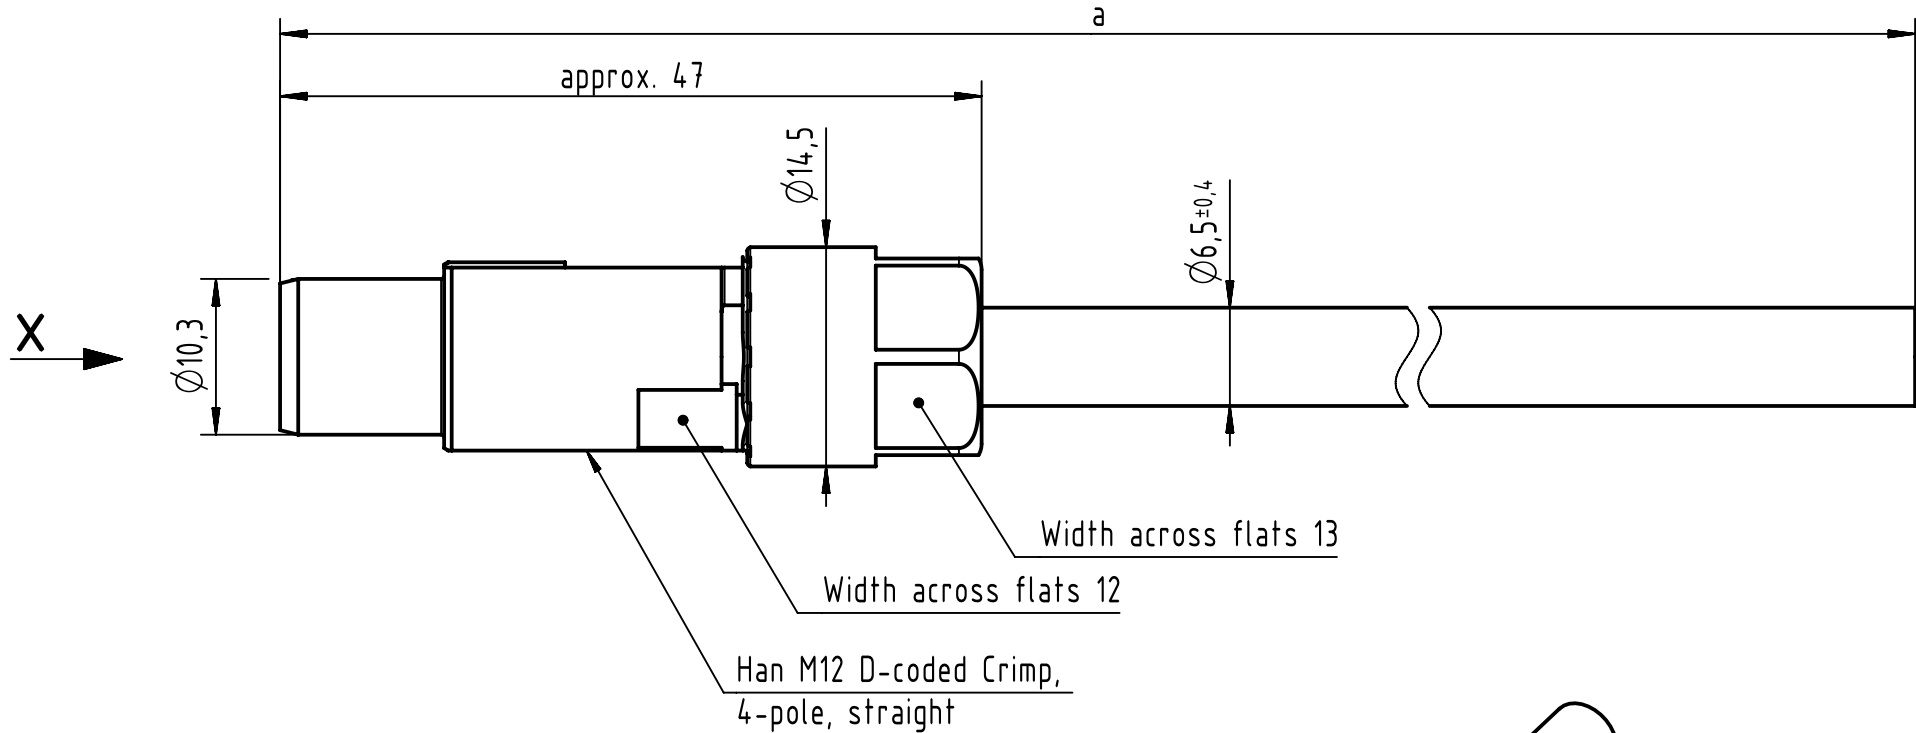

X
male



Loading Plan

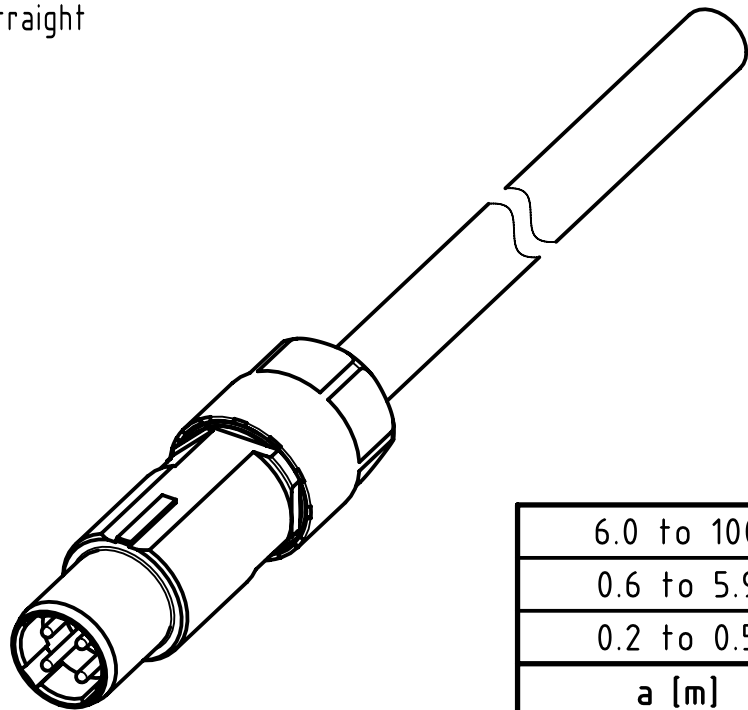

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

HAR PROFINET Typ C
4xAWG 22/7 PUR Trail. green

0948C200004XXX

Type of cable

Part no.

- Temperature range: -40°C ... +70°C

		All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by MUNTEANV Muntean		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean		Date 2023-06-16	
Department HCS - RO		Title Han M12 D-cod 4-pol m/- PUR		State Final Release		Doc-Key / ECM-Nr. 101002860/UGD/000/B 500000245601		Rev. B	
HARTING Customised Solutions D-32339 Espelkamp		Type TB		Number 0948C200004XXX		Page 1/1			