


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

- **1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE COLOR AND OR PACKAGE QUANTITY.
- 2. CONSTRUCTED WITH CAT6A SCREENED 9 WIRE, FOUR SHIELDED TWISTED PAIR PLUS A 9TH WIRE, STRANDED 26AWG LSZH CABLE.
- 3. TERMINATED WITH (8 POSITION) SHIELDED MODULAR PLUG AND 1-9TH POSITION CONTACT AT BOTH ENDS.
- 4. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

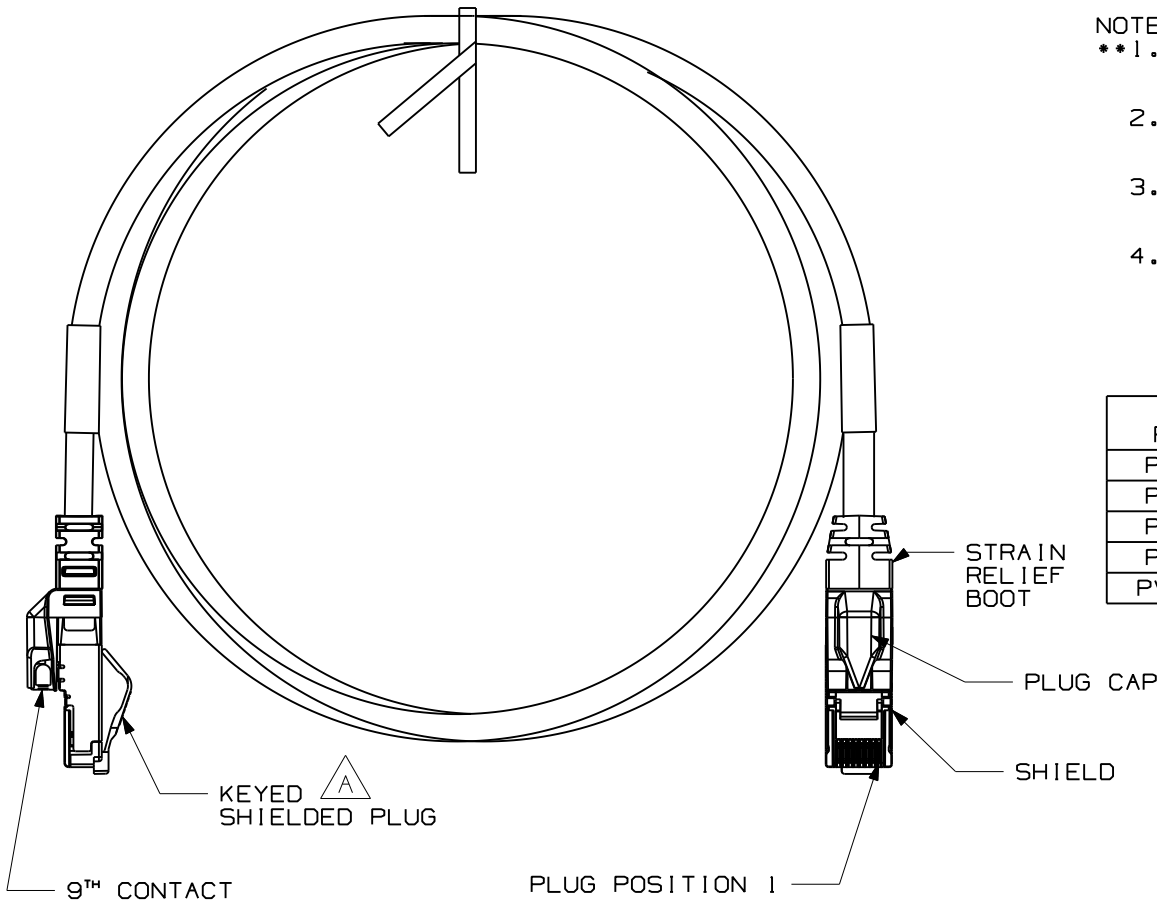

PANDUIT PART NUMBER	MINIMUM CABLE LENGTH	WEIGHT
PVSTP6X1MB**	1 METER	68g/EACH
PVSTP6X2MB**	2 METERS	115g/EACH
PVSTP6X3MB**	3 METERS	156g/EACH
PVSTP6X5MB**	5 METERS	234g/EACH
PVSTP6X10MB**	10 METERS	433g/EACH

EIA/TIA T568B WIRING SCHEME	
PLUG POSITION	CABLE WIRE
1	RED
2	ORANGE
3	BLACK
4	BLUE
5	WHITE
6	GREEN
7	YELLOW
8	BROWN

SIZE

A

DRAWING FILENAME M02489AC_DC03/00B

PANVIEW TX6 10GIG SHIELDED PATCH CORD CUSTOMER DRAWING

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
I	12-02-09	MDJr		A. UPDATED CORD TO SHOW NEW KEYED PLUG HOUSING.	02489-03				
R	10/3/06	MLJ	DCK	RELEASED TO PRODUCTION	02489-03				

<p>PANDUIT™ CORP. TINLEY PARK, ILL 60477</p>	I.I. NUMBER
	PRODUCT SPEC/ PKG SPEC
<p>THIRD ANGLE PROJECTION</p>	ASSY METHOD/ TEST METHOD
	SCALE NONE
DRAWN BY MLJ	PART NO. PVSTP6X*MB**
DATE 10/03/06	DRAWING NO. 02489-03
CHK'D DCK	